



TUMO Gunma デジタルサイネージ

8Kを超える解像度のため、下記ピクセルマップにて放映可能なように設定を行います。
(図の縮尺はイメージ)

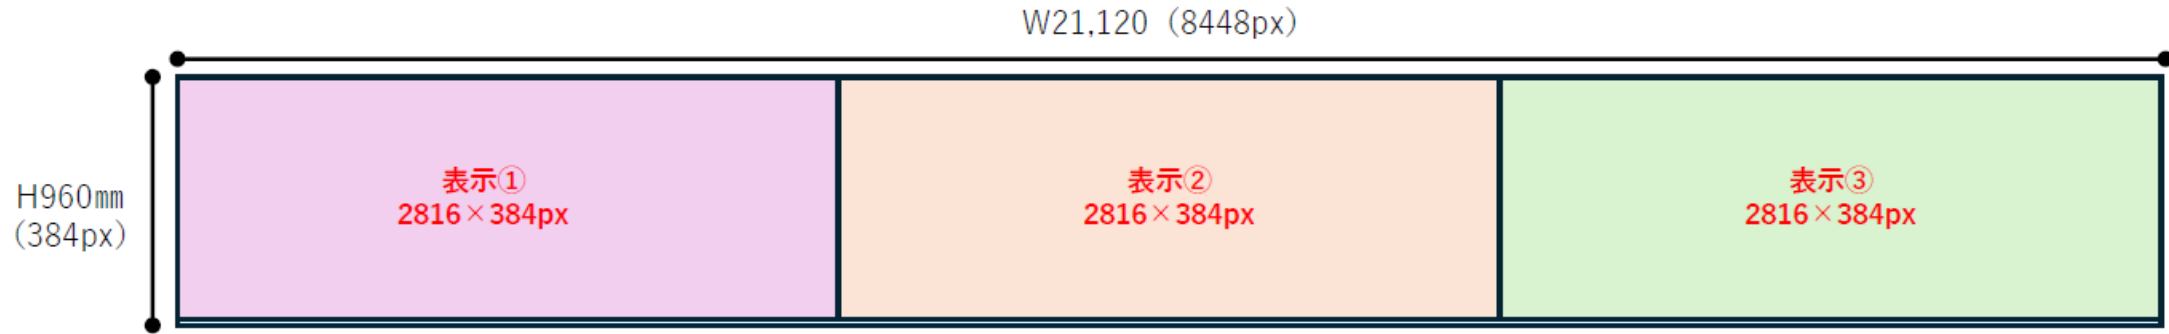

映像制作は下記のように作成ください。
複数コンテンツを当て込む際はスイッチャー等の導入を推奨します。

ドットバイ放映且つ1出力機で放映する場合



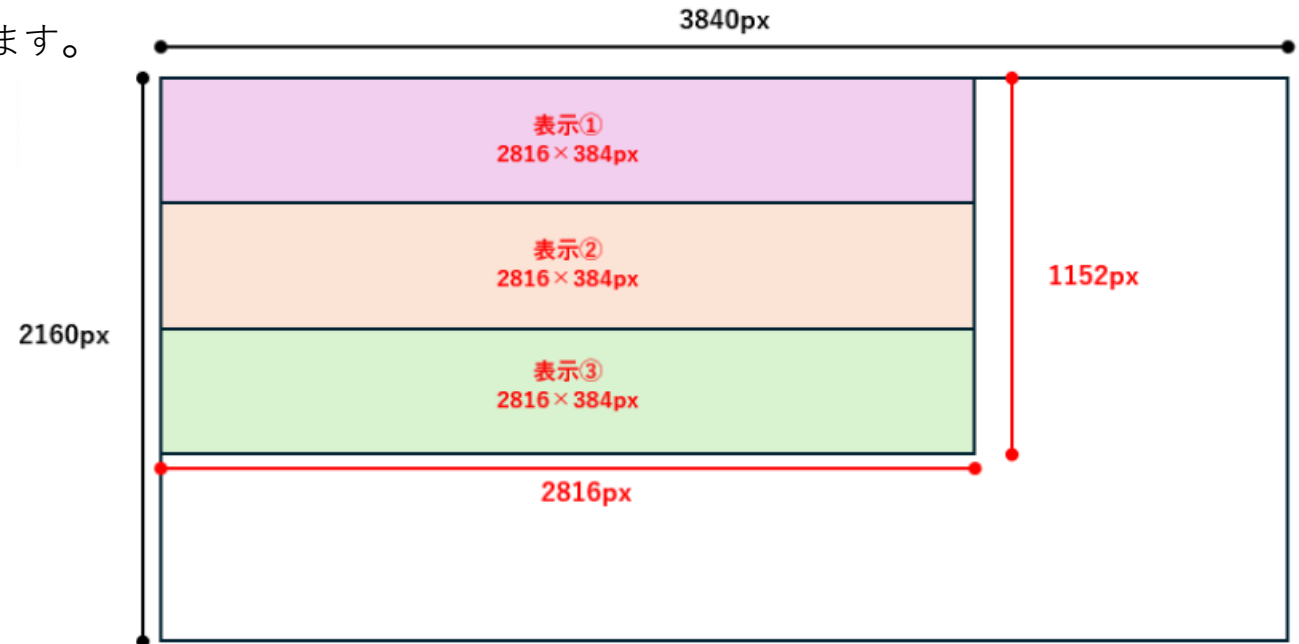


TUMO Gunma デジタルサイネージ

導入LEDコントローラー



NOVA Pro UHD JR/LEDコントローラー

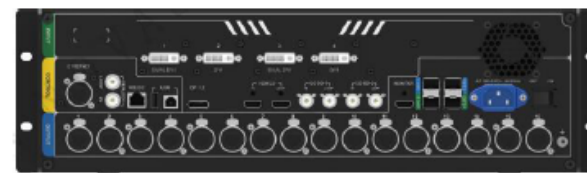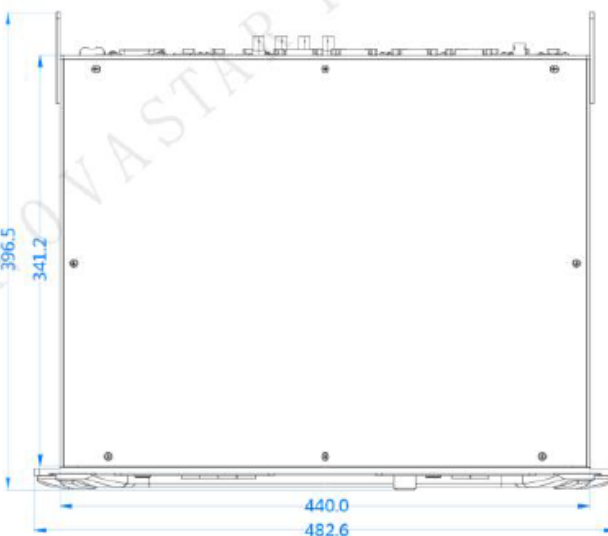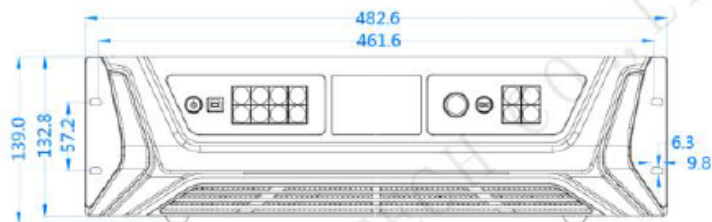

INPUT入力端子

- DVI × 4
- 12G - SDI × 2
- DP1.2 × 1
- HDMI2.0 × 1

Input		
Connector	Quantity	Description
DVI	4	• Four DVIs are all single-link DVI connectors by default. - 4 × DVI inputs - Each DVI: Input resolution up to 1920×1200@60Hz, downward compatible - 4 DVI input sources constitute 1 input source (DVI MOSAIC). - Standard resolutions supported
		• In dual-link mode - DVI 1 and DVI 3 are dual-link DVI connectors while DVI 2 and DVI 4 are unavailable. - DVI 1/DVI 3: Input resolution up to 3840×1080@60Hz, downward compatible - Standard resolutions supported
12G-SDI	2	• Input resolution up to 4096×2160@60Hz, downward compatible • Standard resolutions unsupported
DP 1.2	1	• Input resolution up to 3840×2160 @60Hz, downward compatible • HDCP 1.3 compliant • Standard resolutions supported
HDMI 2.0	1	• Input resolution up to 3840×2160 @60Hz, downward compatible • HDCP 1.4 • EDID management • Standard resolutions supported

