

令和8年3月31日まで適用する基準降雨

降雨強度式：クリーブランド

降雨波形：中央集中型

生起確率：10年に1度

基準地点：足利

[休泊川流域全域（太田市・大泉町・千代田町）の雨水浸透阻害行為に適用]

確率別継続時間降雨強度曲線

地点：足利

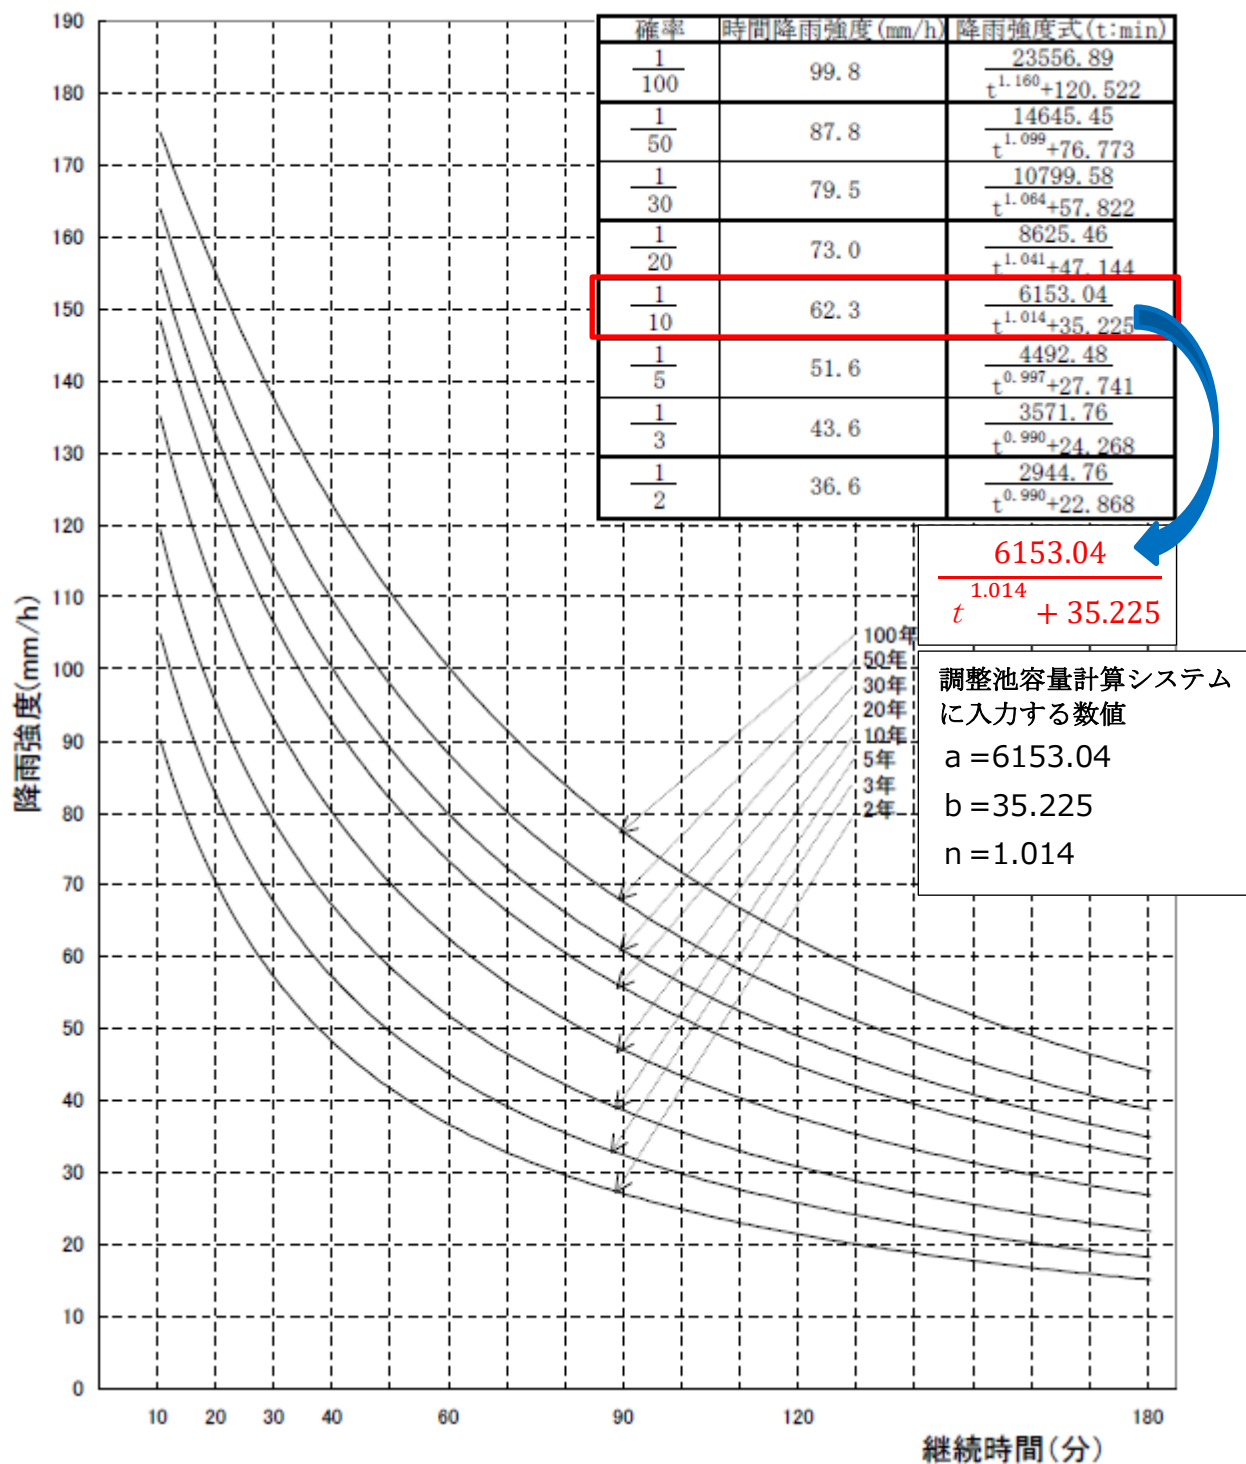


図2-1 確率別継続時間降雨強度曲線

表2-1 24時間の10分ごとの時間帯における降雨強度表

時	分	降雨量 (mm/h)	時	分	降雨量 (mm/h)	時	分	降雨量 (mm/h)	時	分	降雨量 (mm/h)
0	0-10	0.0311	6	0-10	0.2300	12	0-10	84.3561	18	0-10	0.2081
	10-20	0.0327		10-20	0.2463		10-20	41.4145		10-20	0.1949
	20-30	0.0345		20-30	0.2641		20-30	24.3533		20-30	0.1828
	30-40	0.0363		30-40	0.2837		30-40	15.9338		30-40	0.1716
	40-50	0.0382		40-50	0.3052		40-50	11.1860		40-50	0.1613
	50-60	0.0402		50-60	0.3288		50-60	8.2552		50-60	0.1517
1	0-10	0.0423	7	0-10	0.3550	13	0-10	6.3236	19	0-10	0.1429
	10-20	0.0445		10-20	0.3840		10-20	4.9858		10-20	0.1346
	20-30	0.0469		20-30	0.4163		20-30	4.0226		20-30	0.1269
	30-40	0.0494		30-40	0.4523		30-40	3.3068		30-40	0.1198
	40-50	0.0520		40-50	0.4927		40-50	2.7612		40-50	0.1131
	50-60	0.0547		50-60	0.5380		50-60	2.3361		50-60	0.1069
2	0-10	0.0576	8	0-10	0.5893	14	0-10	1.9988	20	0-10	0.1011
	10-20	0.0607		10-20	0.6475		10-20	1.7269		10-20	0.0956
	20-30	0.0640		20-30	0.7139		20-30	1.5046		20-30	0.0905
	30-40	0.0674		30-40	0.7901		30-40	1.3208		30-40	0.0857
	40-50	0.0710		40-50	0.8780		40-50	1.1672		40-50	0.0812
	50-60	0.0749		50-60	0.9801		50-60	1.0375		50-60	0.0769
3	0-10	0.0790	9	0-10	1.0997	15	0-10	0.9271	21	0-10	0.0730
	10-20	0.0834		10-20	1.2407		10-20	0.8324		10-20	0.0692
	20-30	0.0881		20-30	1.4085		20-30	0.7507		20-30	0.0656
	30-40	0.0930		30-40	1.6103		30-40	0.6796		30-40	0.0623
	40-50	0.0983		40-50	1.8557		40-50	0.6175		40-50	0.0591
	50-60	0.1039		50-60	2.1580		50-60	0.5629		50-60	0.0561
4	0-10	0.1100	10	0-10	2.5359	16	0-10	0.5147	22	0-10	0.0533
	10-20	0.1164		10-20	3.0163		10-20	0.4719		10-20	0.0506
	20-30	0.1233		20-30	3.6394		20-30	0.4338		20-30	0.0481
	30-40	0.1307		30-40	4.4668		30-40	0.3997		30-40	0.0457
	40-50	0.1387		40-50	5.5971		40-50	0.3691		40-50	0.0434
	50-60	0.1472		50-60	7.1959		50-60	0.3416		50-60	0.0412
5	0-10	0.1564	11	0-10	9.5585	17	0-10	0.3167	23	0-10	0.0392
	10-20	0.1664		10-20	13.2536		10-20	0.2942		10-20	0.0372
	20-30	0.1771		20-30	19.4919		20-30	0.2737		20-30	0.0354
	30-40	0.1888		30-40	31.2340		30-40	0.2550		30-40	0.0336
	40-50	0.2014		40-50	57.3665		40-50	0.2380		40-50	0.0319
	50-60	0.2151		50-60	135.0755		50-60	0.2224		50-60	0.0303